


System depiction



## System depiction


### View from outside

The number of guide cords and distance to each other is determined project specifically by the manufacturer.

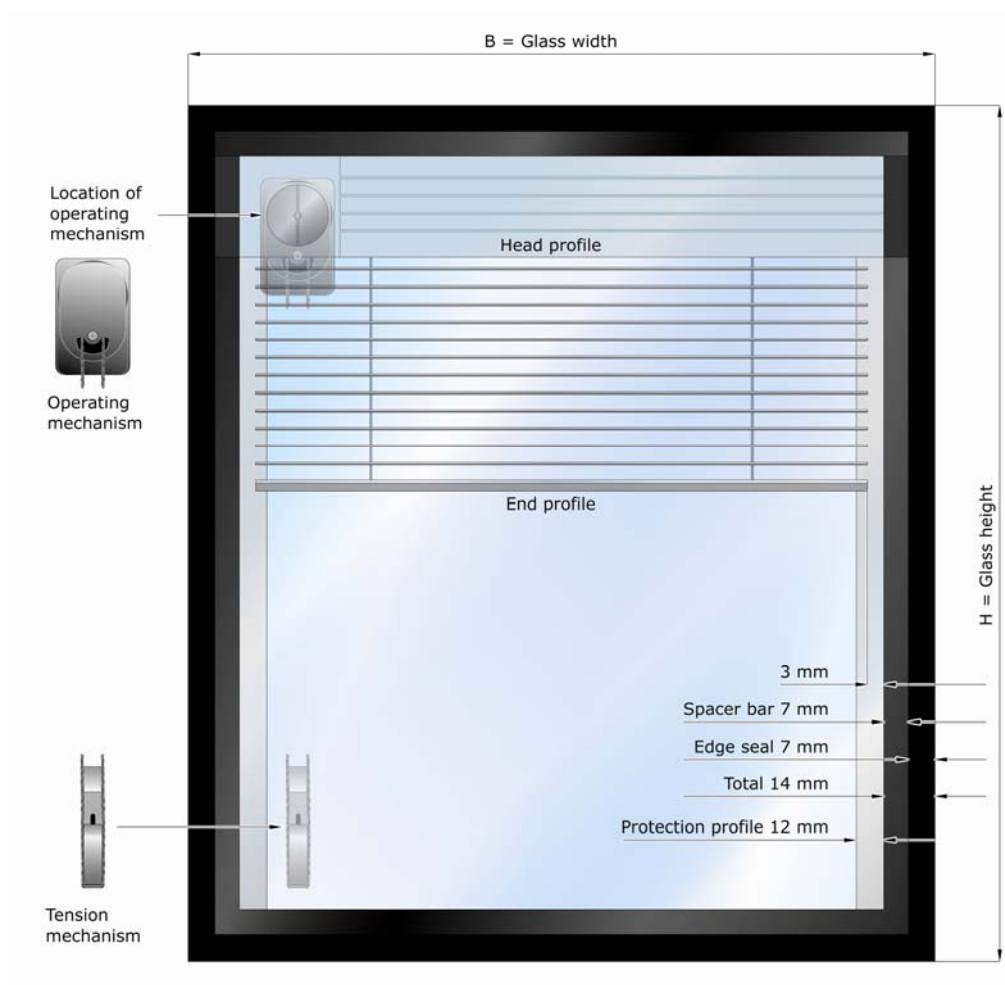

System depiction

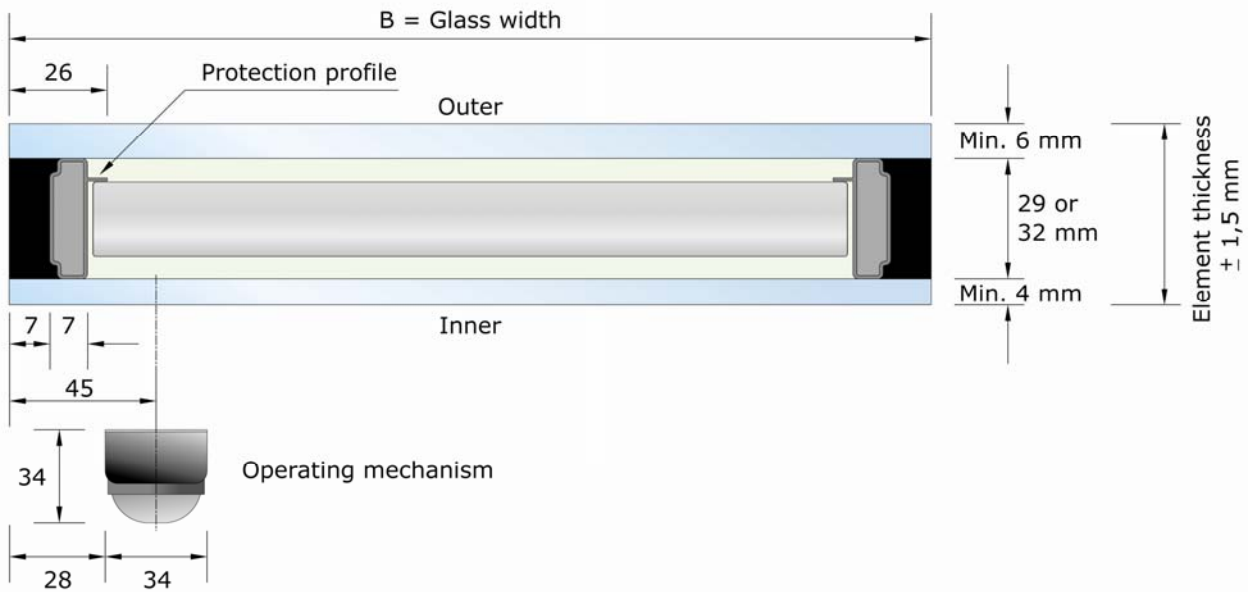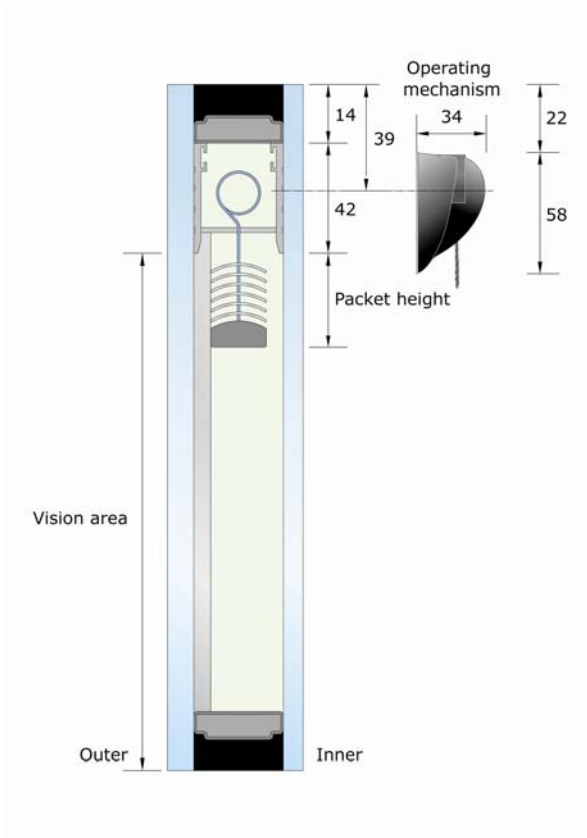

 System depiction**Pull-cord – manual operating mechanism**

The control of the functions is carried out via an endless cord ring, which allows the tilting of the louvres as well as lifting and lowering of the complete blind. The operation is easy and is facilitated by a speed-reducing gearbox.

The manual operating mechanism is located on the room-side surface of the insulated unit – either in the left or right upper corner.

Tilting, lifting or lowering of the louvre blind is carried out by pulling on the cord-ring. The power transfer is achieved by means of permanent magnets without piercing the glass.