








CIE015:2018

EN410:2011

EN15804:2012+A2:2019

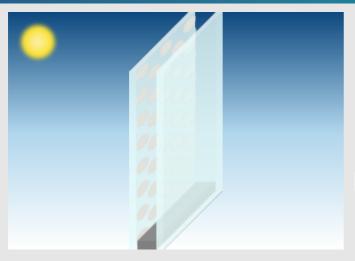

PLANICLEAR (6 mm) BF2WS White (44 %) Design: ID 513 - Dots Pane 1 Diameter: 3mm Cavity 1 ARGON (90%) / AIR (10%) / 16 mm Pane 2 PLANICLEAR (6 mm)

Foster + Partner - Sample 2

vandaglas Eckelt GmbH application engineering Karl Seiringer Resthofstraße 18 4400 Steyr Austria +43 7252 894 1116 karl.seiringer@vandaglas.at



LUMINOUS FACTORS

Light transmission (TL %) 58 % Outdoor reflection (RLe %) 32 % Indoor (RLi %) 35 %



SOLAR FACTORS

Solar factor (g) 0,57 (solar heat gain coefficient) 0,66

Shading Coefficient (SC)



COLOR RENDERING CIE015:2018

Transmission (Ra) Reflection (Ra) 95,7



CARBON FOOTPRINT

Global warming potential 'GWP' N/A (A1-A3)

EN410:2011 **ENERGY FACTORS**

Transmission (Te) 53 % Reflection (Ree) 26 % Indoor (Rei) 28 % Absorption (AE1) 17 % Absorption (AE2) 4 %



THERMAL TRANSMISSION

2,6 W/m².K 0° related to vertical position

EN673:2011



MANUFACTURING SIZES

Nominal thickness 28,0 mm Weight 30 kg/m²

